

Product Specification


No. / QA / PT. Fillattice Indah Industry / Jan / 2020
 Product: **linel® (100% Recycled Spandex) tape**
 Variety:



Application; TEXTILES: Intimate apparel, Underwear, Swimwear, Socks & Activewear

TO/B S - R linel® tape Physical Properties	Unit	Product Specification (±5%)									
Width	mm	3*	4	5*	6	8	9*	10	12	12R*	
	inch	1/8"	3/19"	3/16"	1/4"	5/16"	1/3"	3/8"	1/2"	1/2"	
Thickness	µm	110	110	100	90	95	90	90	110	130	
Count	dTex	3200	4200	4800	5200	7500	8200	8800	13500	15000	
Yield	mt/Kg	3125	2380	2080	1920	1330	1220	1135	805	665	
	yd/lb	1552	1183	1035	955	662	606	564	368	331	
Modulus - Load CA3 (strength at elongation 300 %-1st cycle)	cN /dTex	≥0.1									
Elongation at Rupture	%	≥500									
Tenacity - Load at Rupture	cN /dTex	≥0.2									
Chlorine resistance; linel® VS natural rubber (after 96 hours)	+ %	30									
Talc content	%	No									
Silicon content	%	No									
Colour (1)	-	Off-White									

(1) & * : Black as well as other colors
 300 to 500 kg MOQ

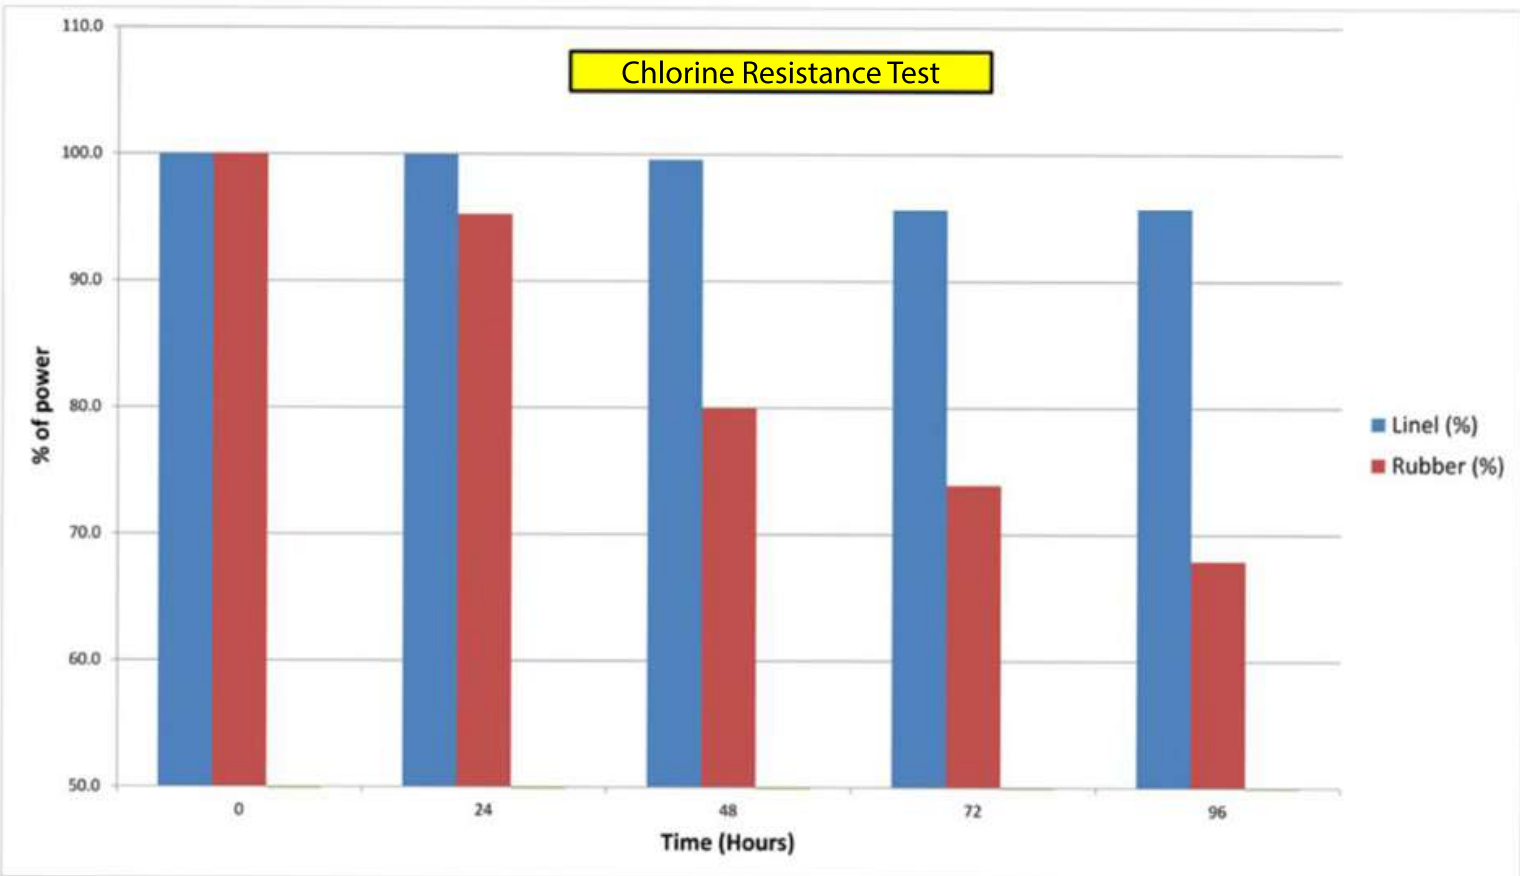

STANDARD PACKAGING :

2 to 2.5 kg carton boxes with plastic lining tail/end is the packaging fitting on a pallet

There are 20 boxes on each pallet layer, about 45 kg, for a total of about 315 per pallet

A max of 7 layers per standard container giving the following data:

- 20' container : 10 pallets 2 / 2.5 kg x 20 x 7 x 10 = about 3,000 kg net
- 40' container : 21 pallets 2 / 2.5 kg x 20 x 7 x 21 = about 6,500 kg net



Siti
FILLATTICE INDAH INDUSTRY

Telp. (62-21)55657000,50205555 (Hunting)
 Fax. (62-21)55655336
www.linel-tape.com